

AD-A036 117 COLD REGIONS RESEARCH AND ENGINEERING LAB HANOVER N H F/6 13/2
TEMPERATURE REGIME IN LOW-HEAD EARTH DAMS IN CENTRAL YAKUTIAA (--ETC(U)
JAN 77 R V CHZHAN
UNCLASSIFIED CRREL-TL-581 NL

1 OF 1
AD
A036117



END
DATE
FILMED
3-77



TL 581



Draft Translation 581✓
January 1977


12
B.S.

ADA036117

TEMPERATURE REGIME IN LOW-HEAD EARTH DAMS IN CENTRAL YAKUTIA

R.V. Chzhan

COPY AVAILABLE TO DDC DOES NOT
PERMIT FULLY LEGIBLE PRODUCTION

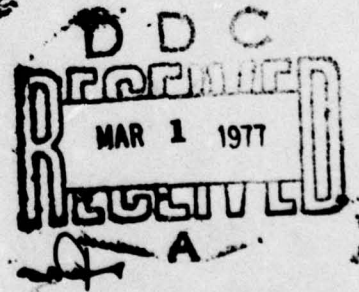

CORPS OF ENGINEERS, U.S. ARMY
COLD REGIONS RESEARCH AND ENGINEERING LABORATORY
HANOVER, NEW HAMPSHIRE

Approved for public release; distribution unlimited.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Draft Translation 581	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) TEMPERATURE REGIME IN LOW-HEAD EARTH DAMS IN CENTRAL YAKUTIA		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) R.V. Chzhan		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Cold Regions Research and Engineering Laboratory Hanover, New Hampshire		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE January 1977
		13. NUMBER OF PAGES 11
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report)
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) THERMAL REGIME EARTH DAMS DAMS		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The Institute of Permafrost Studies of the Siberian Department of the USSR Academy of Sciences carried out studies of the processes of formation of the heat regime of catchwork and storage earth dams applicable to the climatic and engineering-geocryological conditions of the Tatta River valley where, to solve the water supply problem in Alekseyevskiy and Churapchinskiy regions of the Yakut USSR using water from the Anga River, a series of earth dams was planned for construction. The basic results of the thermal engineering fore-		

ACCESSION FOR	
STIS	Whole Section <input checked="" type="checkbox"/>
DBS	Dist. Section <input type="checkbox"/>
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
1	2
3	4

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

casts made are given here.

1944

1945

1946

1947

1948

1949

1950

1951

1952

1953

1954

1955

1956

1957

1958

1959

1960

1961

1962

1963

1964

1965

1966

1967

1968

1969

1970

1971

1972

1973

1974

1975

1976

1977

1978

1979

1980

1981

1982

1983

1984

1985

1986

1987

1988

1989

1990

1991

1992

1993

1994

1995

1996

1997

1998

1999

2000

2001

2002

2003

2004

2005

2006

2007

2008

2009

2010

2011

2012

2013

2014

2015

2016

2017

2018

2019

2020

2021

2022

2023

2024

2025

2026

2027

2028

2029

2030

2031

2032

2033

2034

2035

2036

2037

2038

2039

2040

2041

2042

2043

2044

2045

2046

2047

2048

2049

2050

2051

2052

2053

2054

2055

2056

2057

2058

2059

2060

2061

2062

2063

2064

2065

2066

2067

2068

2069

2070

2071

2072

2073

2074

2075

2076

2077

2078

2079

2080

2081

2082

2083

2084

2085

2086

2087

2088

2089

2090

2091

2092

2093

2094

2095

2096

2097

2098

2099

2100

2101

2102

2103

2104

2105

2106

2107

2108

2109

2110

2111

2112

2113

2114

2115

2116

2117

2118

2119

2120

2121

2122

2123

2124

2125

2126

2127

2128

2129

2130

2131

2132

2133

2134

2135

2136

2137

2138

2139

2140

2141

2142

2143

2144

2145

2146

2147

2148

2149

2150

2151

2152

2153

2154

2155

2156

2157

2158

2159

2160

2161

2162

2163

2164

2165

2166

2167

2168

2169

2170

2171

2172

2173

2174

2175

2176

2177

2178

2179

2180

2181

2182

2183

2184

2185

2186

2187

2188

2189

2190

2191

2192

2193

2194

2195

2196

2197

2198

2199

2200

2201

2202

2203

2204

2205

2206

2207

2208

2209

2210

2211

2212

2213

2214

2215

2216

2217

2218

2219

2220

2221

2222

2223

2224

2225

2226

2227

2228

2229

2230

2231

2232

2233

2234

2235

2236

2237

2238

2239

2240

2241

2242

2243

2244

2245

2246

2247

2248

2249

2250

2251

2252

2253

2254

2255

2256

2257

2258

2259

2260

2261

2262

2263

2264

2265

2266

2267

2268

2269

2270

2271

2272

2273

2274

2275

2276

2277

2278

2279

2280

2281

2282

2283

2284

2285

2286

2287

2288

2289

2290

2291

2292

2293

2294

2295

2296

2297

2298

2299

2300

2301

2302

2303

2304

2305

2306

2307

2308

2309

2310

2311

2312

2313

2314

2315

2316

2317

2318

2319

2320

2321

2322

2323

2324

2325

2326

2327

2328

2329

2330

2331

2332

2333

2334

2335

2336

2337

2338

2339

2340

2341

2342

2343

2344

2345

2346

2347

2348

2349

2350

2351

2352

2353

2354

2355

2356

2357

2358

2359

2360

2361

2362

2363

2364

2365

2366

2367

2368

2369

2370

2371

2372

2373

2374

2375

2376

2377

2378

2379

2380

2381

2382

2383

2384

2385

2386

2387

2388

2389

2390

2391

2392

2393

2394

2395

2396

2397

2398

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

DRAFT TRANSLATION 581

⑪ Jan 77
⑫ 15p.

⑥
ENGLISH TITLE: TEMPERATURE REGIME IN LOW-HEAD EARTH DAMS IN CENTRAL
YAKUTIA

FOREIGN TITLE: (TEMPERATURNII REGIM NIZKONAPORN'KH ZEMLYAN'KH PLOTIN V
USLOVIYAKH SHENTRAL'NOI YAKUTII),

⑩
AUTHOR: R.V./Chzhan

⑭ CRREL-74-581

⑫
SOURCE: Yakutsk. Geokriologicheskkiye Issledovaniya, 1974, p.167-175.

Trans. of mono.

Translated by U.S. Joint Publications Research Service for U.S. Army Cold
Regions Research and Engineering Laboratory, 1976, 11p.

NOTICE

The contents of this publication have been translated as presented in the original text. No attempt has been made to verify the accuracy of any statement contained herein. This translation is published with a minimum of copy editing and graphics preparation in order to expedite the dissemination of information. Requests for additional copies of this document should be addressed to the Defense Documentation Center, Cameron Station, Alexandria, Virginia 22314.

037 100

log

TEMPERATURE REGIME IN LOW-HEAD EARTH DAMS IN CENTRAL YAKUTIA

Yakutsk GEOKRIOLOGICHESKIYE ISSLEDOVANIYA in Russian 1974 pp 167-175

[Article by R. V. Chzhan from the book "Geokriologicheskiye Issledovaniya" (Geocryological Studies), Order of the Labor Red Banner Institute of Permafrost Studies of the Siberian Department of the USSR Academy of Sciences, Yakutsk, 1974]

[Text] Low-head earth dams made of local materials in Central Yakutia are used primarily for agricultural purposes. Storage and catchwork dams averaging 2.5-3 meters in height are used. It should be stated immediately that there is a significant difference in the geocryological conditions of the operation of these two types of dams.

The catchwork dams, which are without water in the winter, freeze intensively from all sides each year. In storage dams the upper section, under the warming influence of the water, maintains a permanently thawed state. The central part and lower section freeze completely and are only subject to seasonal thawing and freezing.

The filtration stability of these types of dams is usually insured by frozen ground: the seasonally frozen layer on the upper section side in catchwork dams and the permanently frozen ground of the central core and lower section in storage dams.

The Institute of Permafrost Studies of the Siberian Department of the USSR Academy of Sciences carried out studies of the processes of formation of the heat regime of catchwork and storage earth dams applicable to the climatic and engineering-geocryological conditions of the Tatta River valley where, to solve the water supply problem in Alekseyevskiy and Churapchinskiy rayons of the Yakut SSR using water from the Anga River, a series of earth dams is planned for construction. The basic results of the thermal engineering forecasts made are given below.

The formation of the temperature regime of the dams was forecast by the hydrothermal analogies method. In solving the problem it was assumed that the process of heat transfer in frozen and thawed ground is accomplished by conduction and that the ground freezes and thaws at 0 degrees.

Table 1. Variations of Calculating the Temperature Fields of the Body and Foundation of Low-Head Earth Dams [Key on following page]

Таблица 1

(a)	(b)	3. значение		(f)	(g)	(h) условия		Влажность грунта тела (i) условия		(j) Состояние плесей		
		в расчете	м, (d)	м, (e)		I	II	в const	в / const	$\delta_{\text{вн}} = 0$	$\delta_{\text{вн}} = \text{const}$	$\delta_{\text{вн}} \neq \text{const}$
6	6	2.5	2.0		внутренний датчик (k)	+	-	-	-	+	-	-
						+	-	-	-	-	+	-
						-	+	-	-	-	-	-
						-	+	-	-	-	-	-
4	6	2.5	2.0		с датчиком с 15 V на 15 VI (1)	+	-	-	-	+	-	-
						-	-	-	-	-	+	-
						-	-	-	-	-	-	+
						-	-	-	-	-	-	-
						-	-	-	-	-	-	-
						-	-	-	-	-	-	-

а) в формулах температурных расчетов α и β по п. 1; (м)
 б) для случаев: характерности грунта и плесей в табл. 2. (н)

(Key to Table 1):

- (a) Height of the Dam, meters;
- (b) Breadth of the Dam at the Crest, meters;
- (c) Emplacement of the Slopes;
- (d) Upstream Slope;
- (e) Downstream Slope;
- (f) Number of the Variation;
- (g) Pool Filled;
- (h) Ground in the Foundation of the Dam;
- (i) Moisture Level of the Ground of the Body of the Dam;
- (j) Snow Cover;
- (k) Year-Round;
- (l) Each Year from 15 May to 15 June;
- (m) For Variations of Geocryological Cross-Sections see Figure 1;
- (n) Physical Characteristics of Grounds Given in Table 2.

During thawing and freezing the thermal characteristics of the grounds change unevenly.

A total of 12 variations of temperature fields were considered, reflecting differences in leveled regime, dam dimensions, composition of the grounds of the foundation, and surface conditions (see Table 1). The calculation was made until stabilization of the thermal regime of the grounds with a precision of 0.2 degrees.

In the variations involving dams with permanent pools readings were taken each month during the first three years of operation and, after that, at the end of the fourth, fifth, seventh, tenth, and fifteenth years. In the catchwork dam variations readings were taken at the same times, except during the period of filling when readings were taken every 10 days.

The following initial data were used in formulating the problems:

1. Dimensions of the dams were adopted from the plan of the Yakutsk division of comprehensive planning of the East Siberian State Planning, Surveying, and Scientific Research Institute of Water Management Construction and are given in Table 1;
2. The grounds of the bodies of the dams are local dust-like sandy loams. Two variations for the foundations of the dams were selected in conformity with actual geocryological conditions in the planning areas (see Table 1). The physical characteristics of the grounds are given in Table 2;
3. The depth of thawing of foundation ground reaches two meters at the end of August. These temperatures are given in Table 3;
4. Construction of the dams is completed in one summer, by the last 10 days of August. The temperature of the ground in the body of the dam at this time is five degrees;

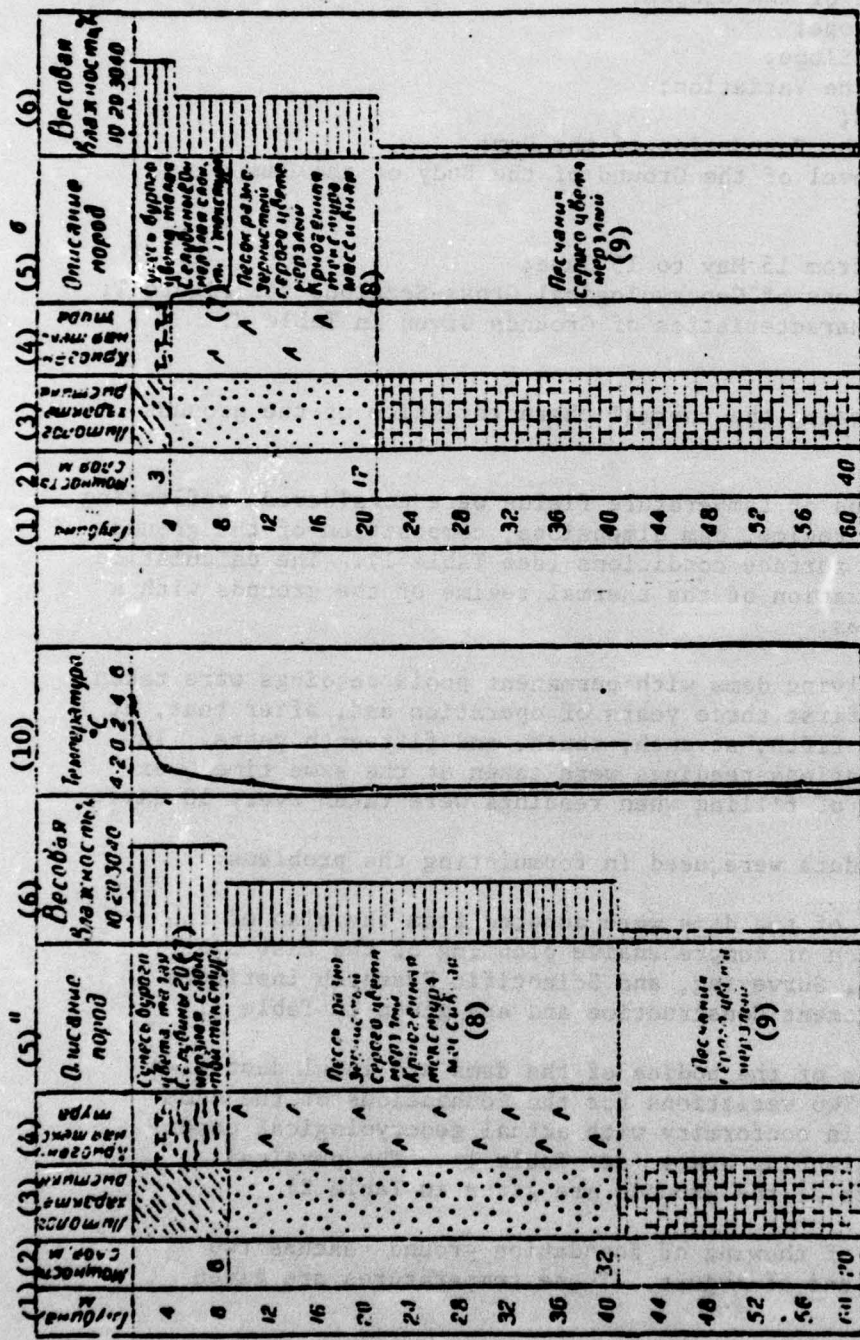


Figure 1. Geological Cross-Section of Grounds in the Foundation of the Projected Dams: a) Variation I, b) Variation II.

Наименование (a)	(b)	Свойства	Размерности	(d) Грунты				Источник (k)
				(e) Плотность		(f) Основание		
				пыле- ватый суглинок (g)	пыле- ватый суглинок (h)	песок (i)	пес- чаный (j)	
(l) Объемный вес	γ	кг/м^3	1600	1700	2000	2000	По данным ин-та БСК (т) Томского гидро- водхоз.	
(m) Влажность	w	%	25	40	25	3		
(n) Коэффициент тепло- проводности талого грунта	λ_t	$\frac{\text{кал/с} \cdot \text{град}}{\text{м}}$	1.16	1.60	2.26	2.00		
(o) То же мерзлого . . .	λ_m	"	1.44	2.00	2.00	2.00	СНГП II-Б. 6-66 (u)	
(p) Объемная теплоемкость талого грунта	C_t	$\frac{\text{кал/с} \cdot \text{град}}{\text{м}^3}$	565	795	705	460		
(q) То же мерзлого . . .	C_m	"	410	520	510	430		

Table 2. Physical Characteristics of Grounds in the Body and Foundation of the Dam

- Key: (a) Name of Characteristic;
 (b) Symbol;
 (c) Unit of Measure;
 (d) Grounds;
 (e) Body of the Dam;
 (f) Foundation of the Dam;
 (g) Dust-like Sandy Loam;
 (h) Dust-like Sandy Loam;
 (i) Sand;
 (j) Sandstone;
 (k) Source;
 (l) Volumetric Weight;
 (m) Moisture Level;
 (n) Heat Conductivity Coefficient of Thawed Ground;
 (o) Same Factor for Frozen Ground;
 (p) Volumetric Heat Capacity of Thawed Ground;
 (q) Same for Frozen Ground;
 (r) $\text{gcal/m} \cdot \text{hr} \cdot \text{degrees}$;
 (s) $\text{gcal/m}^3 \cdot \text{degrees}$;
 (t) According to Figures from the East Siberian Institute;
 (u) Construction Norms and Regulations, N-B 6-66.

1. Глубина, м	0	0.5	1.0	2.0	3.0	5.0	10.0	20.0	40.0
2. Температура °C	5	4	2.2	-0.4	-1.8	-2.2	-3.0	-3.6	-3.7

Table 3. Initial Distribution of Ground Temperature in the Foundation of the Dam. (1 -- depth in meters, 2 -- temperature, degrees C.)

5. The temperature of the ground surface on the dam and in the parts of the upper and lower pools near the dam is taken to be, in sections, the following (see Figure 2):

LCDEF -- the temperature of the air according to monthly averages from data of the Churapcha weather station (see Table 4);

ABL -- the water temperature according to generalized monthly averages obtained from regime observations at different reservoirs of the Irelyakhskoye system and the catchwork pools of the Khorobutskaya and Khos-Yurekhskey land improvement systems (see Table 4);

XX -- the temperature of the permafrost layer, -3.7 degrees according to on-site measurement.

Период месяц	(c) Температура воды, °C			(f) Глубина снежного покрова, см		
	Температура воздуха, °C	постоянный резервуар	ловильный постройки	со стороны верхнего бассейна	гребень	со стороны нижнего бассейна
(a)	(b)	(d)	(e)	(g)	(h)	(i)
I	-45.2	2	—	20	20	40
II	-38.1	2	—	20	20	50
III	-22.5	9	—	20	20	100
IV	-8.8	2	—	20	20	50
V	5.2	1.5	10	—	—	—
VI	14.2	8	12	—	—	—
VII	17.7	10	—	—	—	—
VIII	17.8	10	—	—	—	—
IX	5.2	7	—	—	—	—
X	-9.0	4	—	20	20	5
XI	-28.9	3	—	20	20	10
XII	-41.4	2	—	20	20	20
Год (Year)	-11.5	—	—	—	—	—

Table 4. Long Term Average Monthly Temperatures of the Air and Water in Pools and Amount of Precipitation in Dam Building Region

Key: (a) Period -- Month;
 (b) Air Temperature, degrees C.;
 (c) Water Temperature, degrees C.;
 (d) Permanent Reservoir;
 (e) Catchwork Pool;
 (f) Depth of Snow Cover, centimeters;
 (g) On Upper Pool Side;
 (h) Crest;
 (i) On Lower Pool Side.

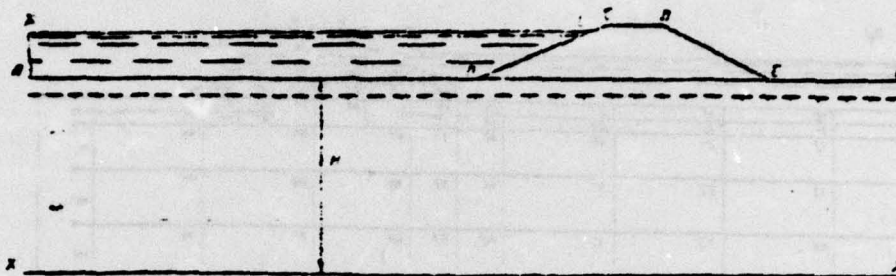


Figure 2. Allocation of Sections with Different Boundary Conditions.

6. In all variations of calculating the dams stand empty in the first winter after construction and freeze from all sides. The permanent pool fills by 15 May. An ice cover one meter thick forms in November and lasts until late April. The catchwork dams hold water for one month a year, from 15 May to 15 June.

A hydrothermal model of the dams is shown in Figure 3. The division into blocks was done to make the dimensions of the blocks minimal at points of abrupt temperature changes. The following scale relationships were adopted in modeling:

a) for variations 1-4 (Table 1):

$$\frac{R}{\rho_r} = \frac{1}{2} \frac{\text{hr} \cdot \text{degree} \cdot \text{cm}^2}{\text{gcal} \cdot \text{min}}; \quad \frac{C}{\varphi_r} = 3,280 \frac{\text{gcal}}{\text{degree} \cdot \text{cm}^2}; \quad \frac{t}{h_r} = 2 \frac{\text{degree}}{\text{cm}};$$

$$\frac{\tau}{\tau_r} = 1,640 \frac{\text{hr}}{\text{min}}; \quad \frac{Q}{V_r} = 6,560 \frac{\text{gcal}}{\text{cm}^3}.$$

b) for variations 5-12 (Table 1):

$$\frac{R}{\rho_r} = \frac{1}{2} \frac{\text{hr} \cdot \text{degree} \cdot \text{cm}^2}{\text{gcal} \cdot \text{min}}; \quad \frac{C}{\varphi_r} = 1,025 \frac{\text{gcal}}{\text{cm}^2}; \quad \frac{t}{h_r} = 2 \frac{\text{degree}}{\text{cm}};$$

$$\frac{\tau}{\tau_r} = 512.5 \frac{\text{hr}}{\text{min}}; \quad \frac{Q}{V_r} = 2,050 \frac{\text{gcal}}{\text{cm}^3}.$$

where t -- temperature in degrees;
 τ -- time of passage of thermal process, hours;
 τ_r -- time of passage of thermal process, hours;
 R -- thermal resistance between blocks, degree-hour/gcal;
 ρ_r -- hydraulic resistance, min/cm²;
 C -- heat capacity, gcal/degree;
 φ_r -- area of cross section of hydraulic vessel, cm²;
 Q -- quantity of heat, gcal;
 V_r -- quantity of water, cm³;
 h_r -- head, cm.

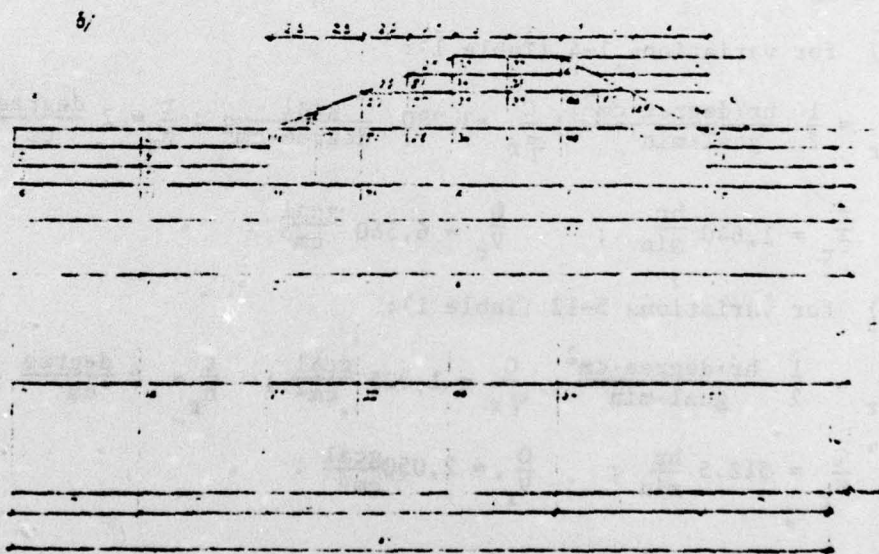
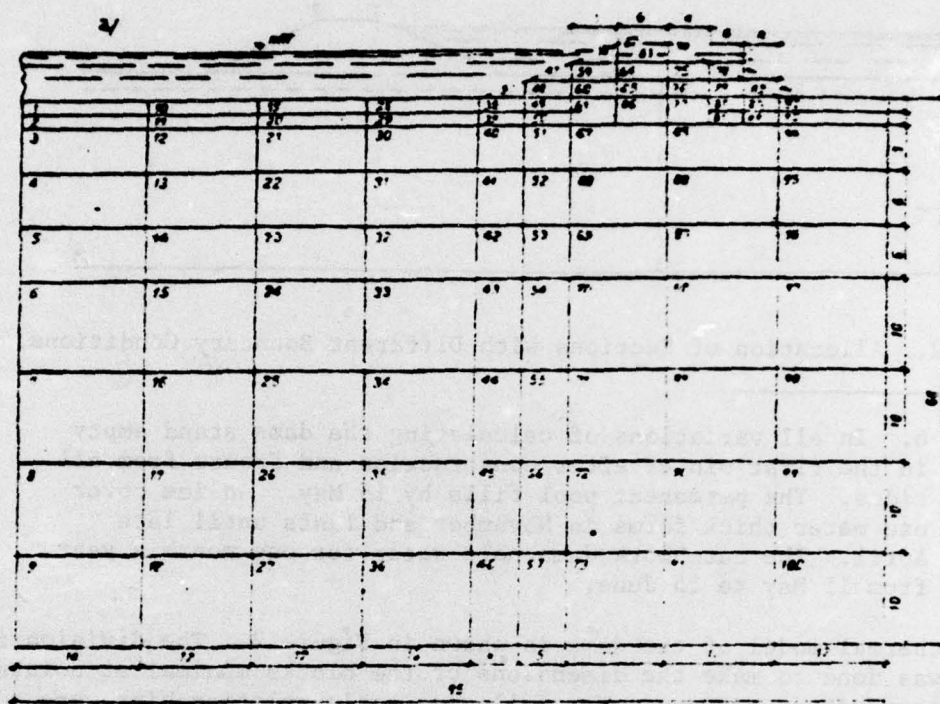


Figure 3. Diagram of the Division into Blocks. Top (a) is Storage Dam; Lower (b) is Catchwork Dam.

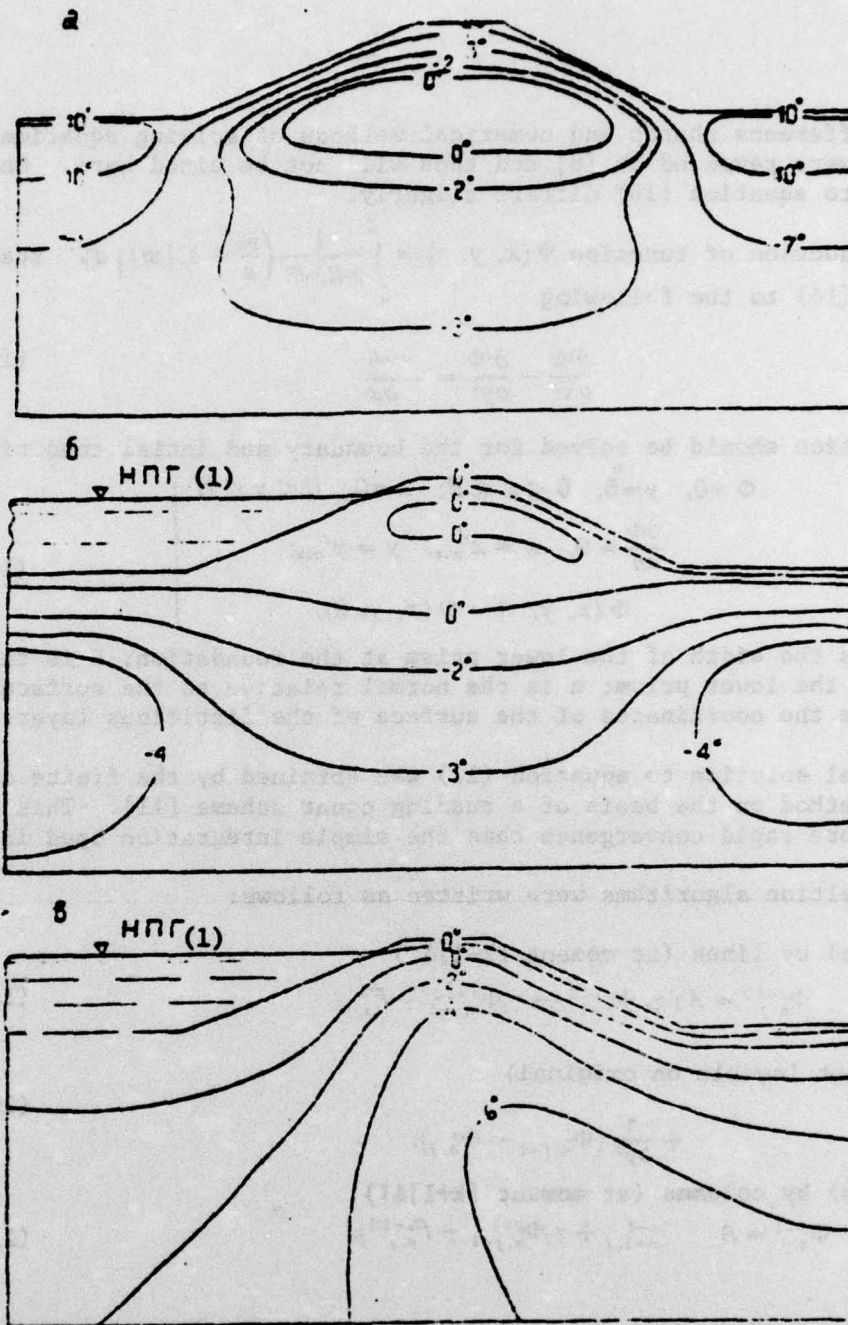


Figure 4. Temperature Fields in the Body and Foundation of a Storage Dam at Different Periods of Operation: a) End of First Winter (April); б) Start of Second Winter (October); B) Moment of Stabilization (October of 15th Year).

Key: (1) Normal Backwater Level.

Finite difference charts and numerical methods of solving equations (12) and (15) were reviewed in [8] and thus will not be cited here. Only the solution to equation (16) differs slightly.

The introduction of function $\Phi(x, y, \tau) = \int_0^z \frac{1}{\rho_n g_n m} \left(\frac{u_n}{k} - b_n |w| \right) dz$ transforms equation (16) to the following

$$\frac{\partial^2 \Phi}{\partial x^2} + \frac{\partial^2 \Phi}{\partial y^2} = - \frac{\partial b}{\partial x} \quad (17)$$

This equation should be solved for the boundary and initial conditions:

$$\left. \begin{aligned} \Phi = 0, \quad y = 0, \quad 0 \leq x \leq B; \quad x = 0, \quad 0 \leq y \leq H; \\ \frac{\partial \Phi}{\partial n} = 0, \quad x = x'_{\text{nos}}, \quad y = y'_{\text{nos}}; \\ \Phi(x, y, \tau) = \Phi(x, y, 0), \end{aligned} \right\} \quad (18)$$

where B is the width of the lower prism at the foundation; H is the elevation of the lower prism; n is the normal relative to the surface; x'_{nos} and y'_{nos} are the coordinates of the surface of the fictitious layer.

A numerical solution to equation (17) was obtained by the finite difference method on the basis of a running count scheme [11]. This scheme insures more rapid convergence than the simple integration used in [8].

The calculation algorithms were written as follows:

a) by lines (at moment $[k-1]\Delta\tau$)

$$\Phi_{n,j}^{s-1,2} = A (\tau_1 \Phi_{n-1,j}^{s-1,2} + \tau_2 \Phi_{n,j-1}^{s-1,2} + F_{n,j}^{s-1,2}) \quad (19)$$

where

(not legible on original)

$$+ \frac{\tau}{\Delta y^2} (\Phi_{n,j+1}^s - \Phi_{n,j}^s) \quad (20)$$

b) by columns (at moment $[k+1]\Delta\tau$)

$$\Phi_{n,j}^{s+1} = A (\tau_1 \Phi_{n-1,j}^{s+1} + \tau_2 \Phi_{n,j-1}^{s+1} + F_{n,j}^{s+1}) \quad (21)$$

where

$$\left. \begin{aligned} F_{n,j}^{s-1,2} &= \Phi_{n,j}^{s-1,2} + \frac{\tau}{2\Delta x} (\Phi_{n-1,j}^k - \Phi_{n+1,j}^k) + \\ &+ \frac{\tau}{\Delta x^2} (\Phi_{n-1,j}^{s-1,2} - \Phi_{n,j}^{s-1,2}) + \frac{\tau}{\Delta y^2} (\Phi_{n,j-1}^{s-1,2} - \Phi_{n,j}^{s-1,2}) \end{aligned} \right\} \quad (22)$$

In this case

$$A = 1/(1 + \tau_1 + \tau_2); \quad \tau_1 = \frac{\tau}{\Delta x^2}; \quad \tau_2 = \frac{\tau}{\Delta y^2};$$

$$\tau = \frac{hD}{4\sqrt{2}}; \quad h = \min(\Delta x, \Delta y); \quad D = \max(D_1, D_2),$$

where D_1 and D_2 represent the diameter of the domain along axes OX and OY respectively; Δx and Δy are steps along coordinates OX and OY; s is the integration number.

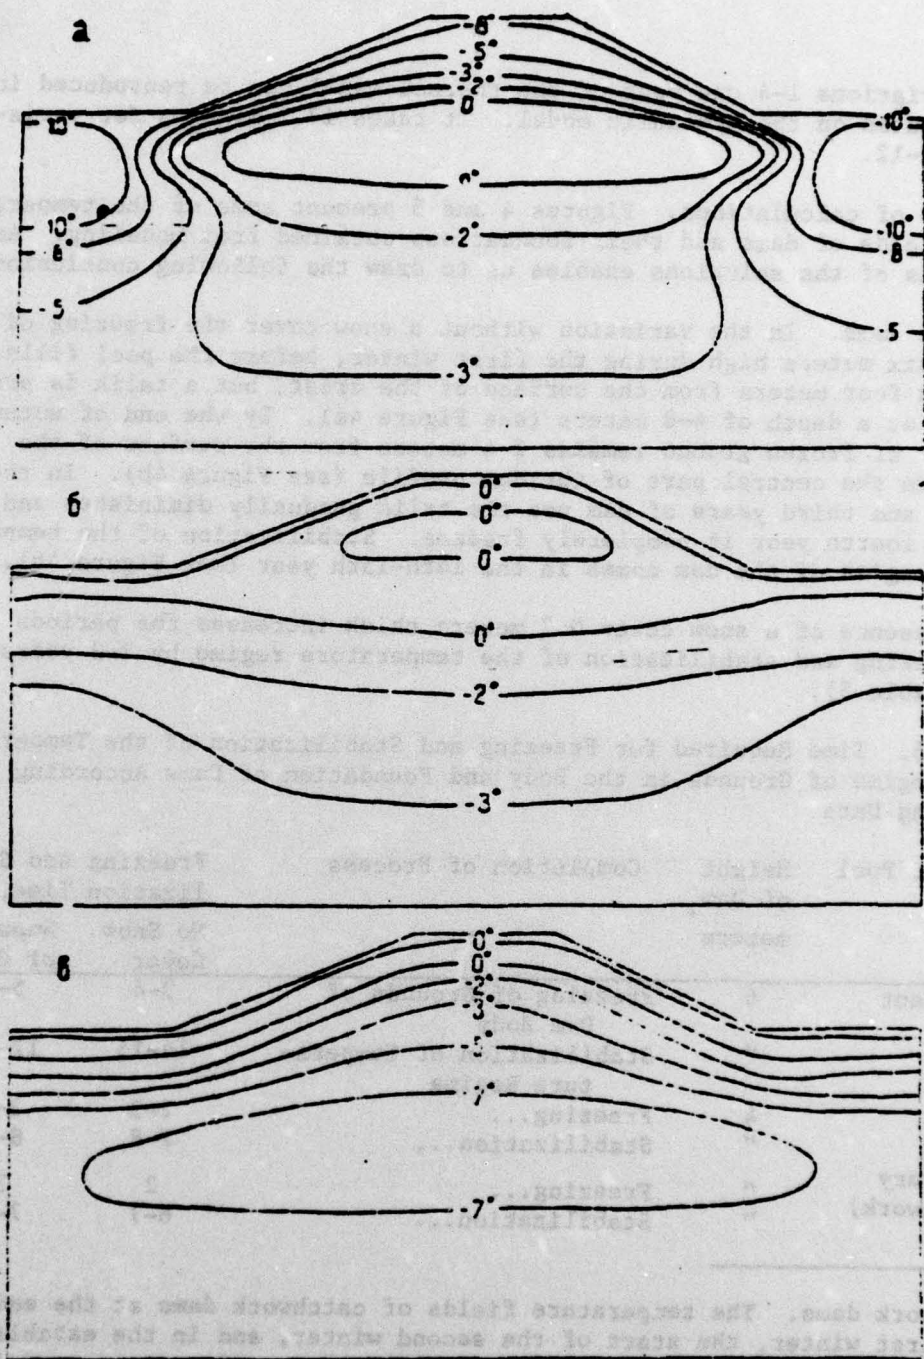


Figure 5. Temperature Fields in the Body and Foundation of a Catchwork Dam at Different Periods of Operation. a) End of the First Winter (April); 6) Start of the Second Winter (October); b) Moment of Stabilization (October of the Seventh Year).

For variations 1-4 one year of the thermal model can be reproduced in 5.3 minutes on the hydraulic model. It takes 17.1 minutes for variations 5-12.

Results of calculations. Figures 4 and 5 present some of the temperature fields of dams and their foundations obtained from modeling. An analysis of the solutions enables us to draw the following conclusions.

Storage dams. In the variation without a snow cover the freezing of a dam six meters high during the first winter, before the pool fills, reaches four meters from the surface of the crest, but a talik is preserved at a depth of 4-8 meters (see Figure 4a). By the end of autumn a layer of frozen ground remains 2-4 meters from the surface of the crest in the central part of the dam profile (see Figure 4b). In the second and third years of dam use the talik gradually diminishes and in the fourth year it completely freezes. Stabilization of the temperature regime of the dam comes in the 14th-15th year (see Figure 4b).

The presence of a snow cover 0.2 meters thick increases the periods of freezing and stabilization of the temperature regime by 2-3 years (see Table 5).

Table 5. Time Required for Freezing and Stabilization of the Temperature Regime of Grounds in the Body and Foundation of Dams According to Modeling Data

Type of Pool	Height of Dam, meters	Completion of Process	Freezing and Stabilization Time, years	
			No Snow Cover	Snow Cover of 0.2 m
Permanent	6	Freezing of Grounds of Dam Body	3-4	5-6
"	"	Stabilization of Temperature Regime	14-15	17-18
"	4	Freezing...	2-3	3-4
"	"	Stabilization...	7-8	8-9
Temporary (Catchwork)	"	Freezing...	2	3
	"	Stabilization...	6-7	7-8

Catchwork dams. The temperature fields of catchwork dams at the end of the first winter, the start of the second winter, and in the established regime indicate (see Figure 5) that in the absence of a snow cover full freezing of a dam four meters in height is completed in the second year and stabilization of the temperature regime occurs in the 6th-7th year.

More detailed summary data on the time of freezing and stabilization of the temperature regime of dams in different variations are given in Table 5.